


**SPECIFICATIONS:**

- 34" x 54" [864mm x 1372mm] LIFT PLATFORM
- 49" x 54" [1245mm x 1372mm] FOOTPRINT
- 50 1/2" [1283mm] TOWER HEIGHT
- 0" - 28" [0mm - 711mm] LIFT RANGE
- MAXIMUM LOAD 750 lbs. [340 Kg.]
- 8 F.P.M [0.04 M/S] LIFT SPEED
- SCREW NUT SYNCHRONOUS BELT DRIVE
- MOTOR: 1/2 H.P. 110V A.C.
- POWER SUPPLY: 110V/1PH/60HZ C/W 15A FUSED DISCON.
- NON-LOAD BEARING BACKUP SAFETY NUT ON LIFT SHAFT
- ZERO-LOAD START IN BOTTOM POSITION

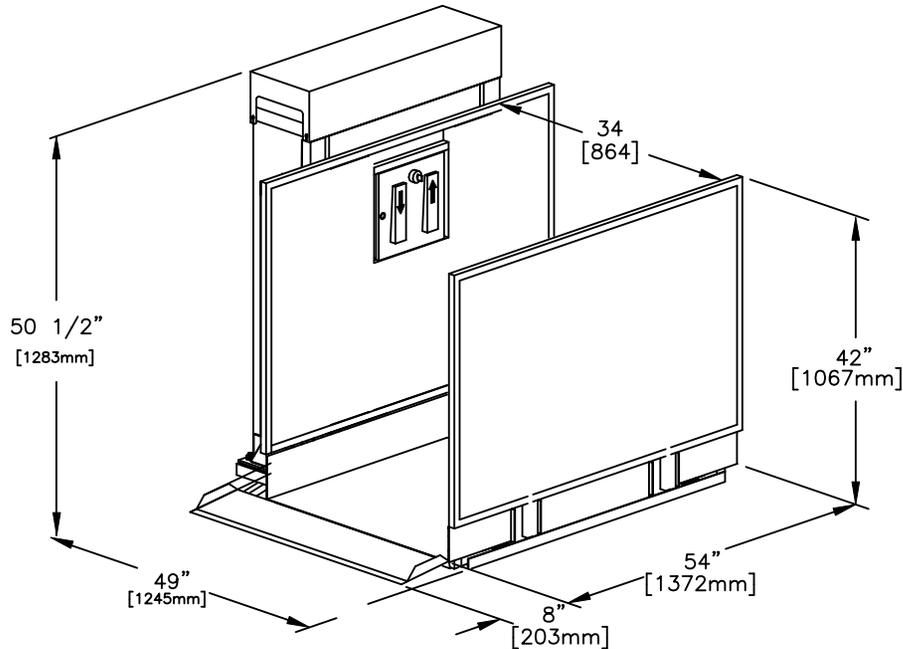


## APEB28STRLAL


<input type="checkbox"/> Accepted as Shown
<input type="checkbox"/> Revise and Resubmit
<input type="checkbox"/> Accepted as Modified
Date: _____
Per: _____

NOTES:  
- Dimensions are in inches and [mm]

JOB No.	TOTAL TRAVEL 28 INCHES 711 mm	No. OF LANDINGS 2	 <i>by Accessibility Professionals</i>			
LOCATION	STRAIGHT THRU ACCESS SAMPLE DRAWING					DWN. BY: AJK
ARCHITECT			CHECKED BY:			
GENERAL CONTRACTOR			SCALE: N.T.S.	DATE: 05/Jul/2021	DRAWING No. 1/2 28CCLDUGNNST	REV A

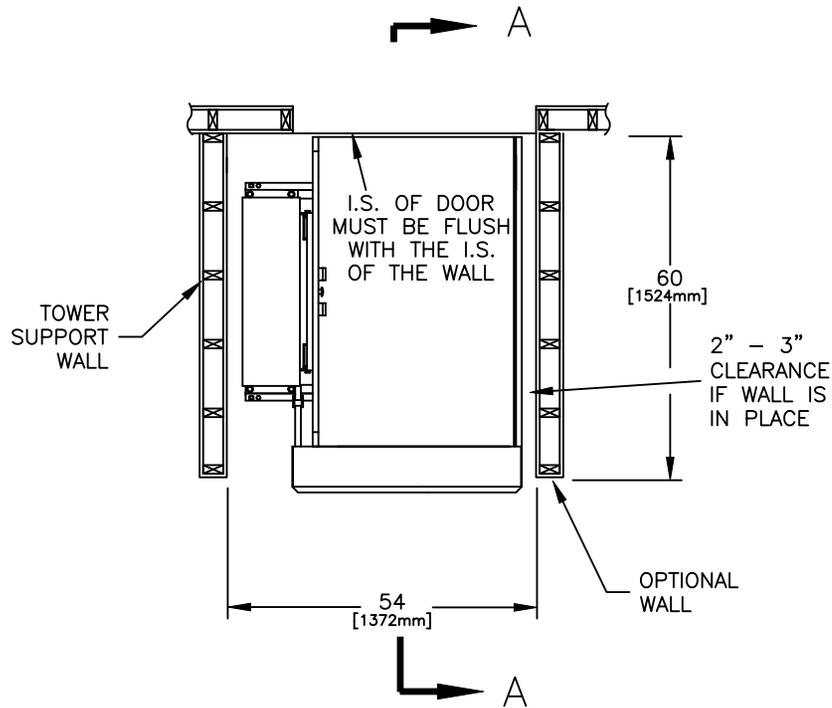

PLAN VIEW SECTION

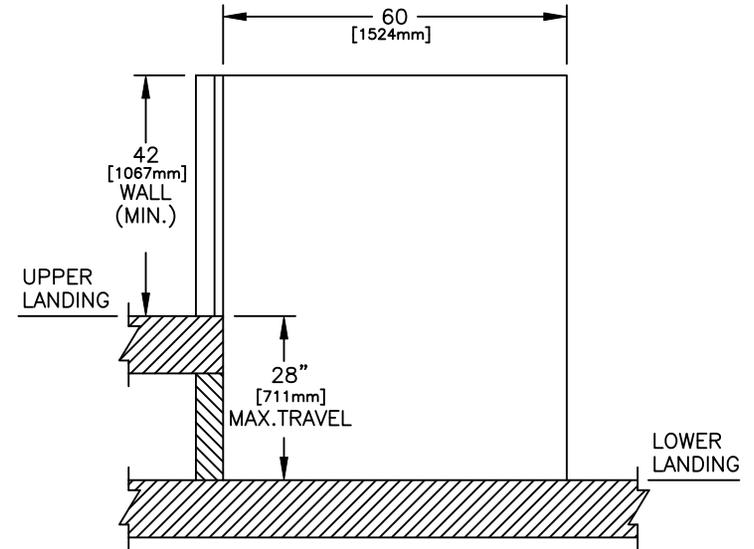

SECTION A-A

JOB No.	TOTAL TRAVEL	28 711	INCHES mm	No. OF LANDINGS	2
LOCATION	STRAIGHT THRU ACCESS SAMPLE DRAWING				
ARCHITECT					
GENERAL CONTRACTOR					

 <i>by Accessibility Professionals</i>			
DWN. BY: AJK		INSTALLATION DETAILS AND SPECIFICATIONS	
CHECKED BY:			
SCALE: N.T.S.	DATE: 05/Jul/2021	DRAWING No. 2/2 28CCLDUGNNST	REV A